

## **ES Shutter Fan**


J&D Manufacturing's ES Shutter Fan is a durable agriculture grade exhaust fan perfect for barn and building peaks, greenhouses, warehouses and more. ES Shutter Fans are available without a cord, or pre-wired with a cord and plug for "No Electrician Required" installation. Fans ship fully assembled out of the box so you're up and running in no time!

## **Features**

- Smooth and guiet operation
- · Ships fully assembled and ready for installation
- Models with cord have 3-prong plug and are pre-wired for 115 Volts. No electrician required!
- Balanced 3 bladed prop with a corrosion resistant coated steel hub
- Coated steel guard allows for easy cleaning and meets OSHA 1910.212(a)(5) requirements to mount at any height on inlet side of fan. (When mounted, shutter side should be 7' above ground.)
- High efficiency aluminum shutters with tie bar to reduce shutter flapping and opening on windy days
- Fully enclosed, maintenance-free, direct drive high-efficiency motors feature sealed ball bearings and a **Two Year Warranty**

				@0.10"SP			
					CFM/		Rough
Part#	Size	Ph	Spd	CFM	Watt	Prop	Opening
With Cord							
Single Ph	nase						
VES10C	10"	1	3	480	6.4	3-Alm	12½" x 12½"
VES12C	12"	1	1/Var^	800	8.7	3-Alm	12½" x 12½"
VES161C	16"	1	1/Var^	1,220	11.9	3-Alm	16 <sup>1</sup> / <sub>2</sub> " x 16 <sup>1</sup> / <sub>2</sub> "
VES201C	20"	1	1/Var^	780	7.4	3-Alm	20 <sup>1</sup> / <sub>2</sub> " x 20 <sup>1</sup> / <sub>2</sub> "
VES20C	20"	1	1/Var^	2,760	9.2	3-Alm	20 <sup>1</sup> / <sub>2</sub> " x 20 <sup>1</sup> / <sub>2</sub> "
VES24C	24"	1	1/Var^	4,080	9.0	3-Alm	24 <sup>1</sup> / <sub>2</sub> " x 24 <sup>1</sup> / <sub>2</sub> "
VES30C	30"	1	1	5,840	10.3	3-Alm	30 <sup>1</sup> / <sub>2</sub> " x 30 <sup>1</sup> / <sub>2</sub> "
No Cord							
Single Ph	nase						
VES12	12"	1	1/Var^	800	8.7	3-Alm	12½" x 12½"
VES161	16"	1	1/Var^	1,220	11.9	3-Alm	16 <sup>1</sup> / <sub>2</sub> " x 16 <sup>1</sup> / <sub>2</sub> "
VES201	20"	1	1/Var^	780	7.4	3-Alm	20 <sup>1</sup> / <sub>2</sub> " x 20 <sup>1</sup> / <sub>2</sub> "
VES20	20"	1	1/Var^	2,760	9.2	3-Alm	20 <sup>1</sup> / <sub>2</sub> " x 20 <sup>1</sup> / <sub>2</sub> "
VES24	24"	1	1/Var^	4,080	9.0	3-Alm	24 <sup>1</sup> / <sub>2</sub> " x 24 <sup>1</sup> / <sub>2</sub> "
VES30	30"	1	1	5,840	10.3	3-Alm	30 <sup>1</sup> / <sub>2</sub> " x 30 <sup>1</sup> / <sub>2</sub> "
Three Phase							
VES243	24"	3	1	4,080	9.0	3-Glv	24 <sup>1</sup> / <sub>2</sub> " x 24 <sup>1</sup> / <sub>2</sub> "
VES303	30"	3	1	5,940		3-Alm	30 <sup>1</sup> / <sub>2</sub> " x 30 <sup>1</sup> / <sub>2</sub> "
<ul> <li>Variable speed fans require separate variable speed control to adjust fan speed.</li> </ul>							
Bold red text is data based on testing performed by							

an accredited lab using ANSI/AMCA Standard 230-12.

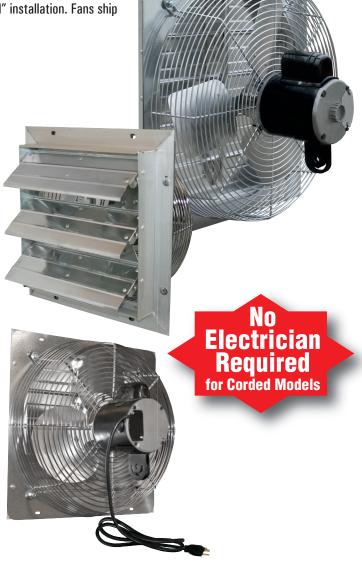

## **Optional Weather Hood**

Shutter	Weather	
Fan Size	Hood	
10"	VFT140855	
12"	VFT140855	
16"	VFT140856	
20"	VFT140857	
24"	VFT140858	
30"	VFT140859	

Weather hood for exterior shutter side of fan

▲ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/product.

Due to our continual effort to provide the best products available and adhere to market conditions; literature, products, prices and availability are subject to change without notice.

