

# Indoor/Outdoor UL507 Certified Wall, Ceiling or Pole Mount Fan

The Indoor/Outdoor POW (Premium Outdoor Waterproof) fan from J&D Manufacturing is a durable, three-speed, waterproof fan. These fans come pre-wired for 115 Volts with an 8' cord and 3-prong plug for no electrician\* required installation.

These fans are perfect in areas that may come in contact with rain, humidity, and water spray like greenhouses, marinas, outdoor loading docks, patios, amusement parks, and wash bays.


\*GFCI (Ground Fault Circuit Interrupter) recommended on all circuits.

## Features

- Available in 14" and 18"
- 18" model available in white or black
- High output performance
- 3-speed pull chain
- Attached 8' cord with 3-prong plug pre-wired for 115 Volts
- Versatile powder coated mounting bracket allows for easy tilt and swivel of fan to easily change direction and angle of air movement
- UL507 certified for indoor and outdoor use
- Aluminum blades
- Direct drive quiet operation
- Corrosion resistant, powder coated fan guards meet OSHA 1910.212(a)(5) requirements for installation at any height
- Totally enclosed, maintenance-free, high-efficiency motors have completely sealed ball bearings, UL and CUL recognized, and are covered by a **One Year Warranty**
- Rated for use with our misting/fogging products to increase cooling abilities
- GFCI (Ground Fault Circuit Interrupter) recommended on all circuits



POW18

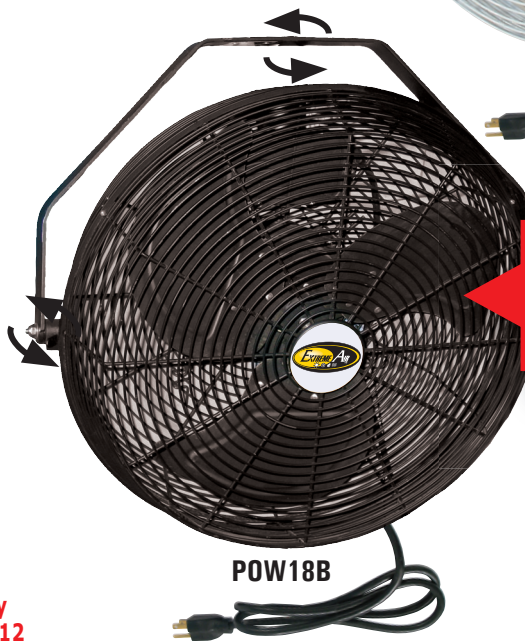

POW18B



POWTPB  
Optional Bracket for Greenhouse or Tent Pole

Part#	Size	Ph	Spd	Thrust CFM	Thrust CFM/Watt	Drive	Prop
<b>Single Phase</b>							
<b>White</b>							
POW14	14"	1	3	<b>1,090</b> <b>1,000</b> <b>870</b>	<b>13.6</b> <b>15.2</b> <b>15.5</b>	Direct	3-Alm
POW18	18"	1	3	<b>2,210</b> <b>1,870</b> <b>1,420</b>	<b>13.9</b> <b>13.4</b> <b>12.7</b>	Direct	3-Alm
<b>Black</b>							
POW18B	18"	1	3	<b>2,210</b> <b>1,870</b> <b>1,420</b>	<b>13.9</b> <b>13.4</b> <b>12.7</b>	Direct	3-Alm
<b>Optional Bracket</b>							
POWTPB	Bracket, Greenhouse/Tent Pole, White Powder Coat, w/U-bolt & Hdwr						

**Bold red text is data based on testing performed by an accredited lab using ANSI/AMCA Standard 230-12**

Due to our continual effort to provide the best products available and adhere to market conditions; literature, products, prices and availability are subject to change without notice.