

Storm Torque

55" Fiberglass Exhaust Fan with Torque Drive

NEW
for Summer
2019

Save Time & Money

- No Belts to Change
- No Pulleys to Maintain
- No Greasing Motor or Bearings



Housing

- Rugged corrosion free fiberglass
- Smooth UV-resistant gel coating on outside for long life
- Slanted to minimize moisture and debris collection

Guard

- Heavy-duty
- Galvanized

Shutter Options

- Aluminum
- Poly

Cone

- Durable one-piece molded poly
- Deep for superior performance

Features


- Maintains a continuous high level of performance with no power loss or reduction from aging belts and pulleys
- VFD (Variable Frequency Drive) compatible and recommended for increased energy savings and longer life (VFD not included)
- Smooth and quiet operation
- Motorized shutter kit **highly** recommended for aluminum shutter model, when fan is operating at 40% or lower
- **20 Year Warranty** on fiberglass housing and poly cone
- Requires 1/3 fewer fans compared to using 48" exhaust fans

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/product.

Due to our continual effort to provide the best products available and adhere to market conditions; literature, products, prices and availability are subject to change without notice.

Storm Torque

55" Fiberglass Exhaust Fan with Torque Drive

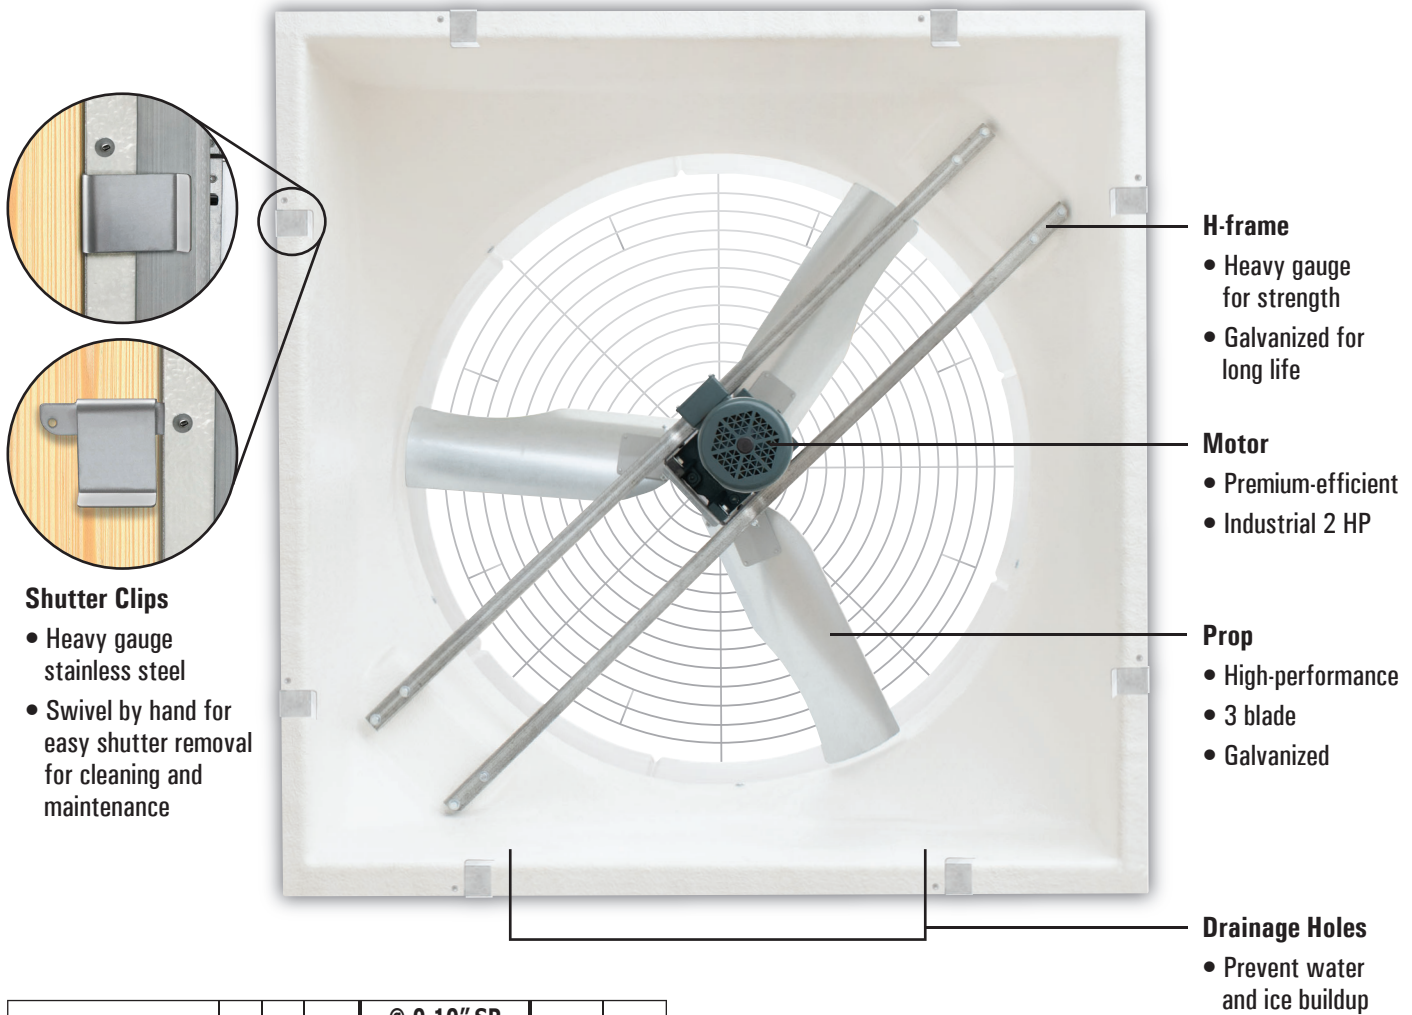

Part #	Sz	Ph	Spd	@ 0.10" SP		Drive	Prop
				CFM	CFM/Watt		
Three Phase							
Aluminum Shutter							
VMTA55G3C23-SL	55"	3	1	29,902	17.7	Torque	3-Glv
Poly Shutter							
VMTP55G3C23-SL	55"	3	1	27,986	16.2	Torque	3-Glv
Accessories							
VFD240V03013A	VFD, 190-240V, 3PH/1PH, with RFI Filter						
VFD480V03030B	VFD, 380-480V, 3PH, with RFI Filter						
VRS1260	Shutter Motor Kit, 12"-60" Al. Shutter						
VRS1260-C	Shutter Motor Kit, 12"-60" Al. Shutter, with Cord						
Black Versions (requires extended lead time)							
Add "-B" to end of part # - Example: VMTA55G3C23-SL-B							

Rough Opening: 59¼" W x 59¼"H

Side-By-Side Recommended OC Dimension: Minimum 67"

Bold red text is data based on testing performed by an accredited lab using ANSI/AMCA Standard 210-07

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/product.

Due to our continual effort to provide the best products available and adhere to market conditions; literature, products, prices and availability are subject to change without notice.