

Wall Master Exhaust Fan

J&D Manufacturing's Wall Master exhaust fan offers high volume output and smooth, efficient operation. The heavy duty 18 gauge galvanized housing is strong, compact, and easy to install. J&D's Wall Master is a dependable fan suited for nearly any application including agricultural buildings, greenhouses, and warehouses.

When installing any J&D Manufacturing exhaust fan, you must provide a proper inlet. Call us today to help you choose the appropriate inlet and design an efficient ventilation system.



Features


- Available in 36" and 50" models
- Heavy duty 18 gauge galvanized housing
- Rugged X-frame for added stability on belt drive models
- Aluminum shutters with tie bar to prevent flapping and locking open
- 1" x 2" removable wire mesh guards are hot dip galvanized after welding
- Poly guard clips to reduce vibration for quiet performance
- 3, 4 or 6 blade galvanized propeller is balanced for smooth operation
- **Lifetime Warranty** on 3 blade cast aluminum props, available on select 50" models
- Bearings are eccentric locking, pre-lubricated, permanently sealed and rubber mounted for smooth operation and reduced blade fatigue, and are covered by a **Three Year Warranty**
- Spring belt tensioning system reduces bounce at startup on all belt driven models
- Optional weather hood available for protection from severe wind and weather
- Totally enclosed, maintenance-free, high-efficiency motors have completely sealed ball bearings, and are covered by a **Two Year Warranty**



⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/product.

Due to our continual effort to provide the best products available and adhere to market conditions; literature, products, prices and availability are subject to change without notice.


Wall Master Exhaust Fan

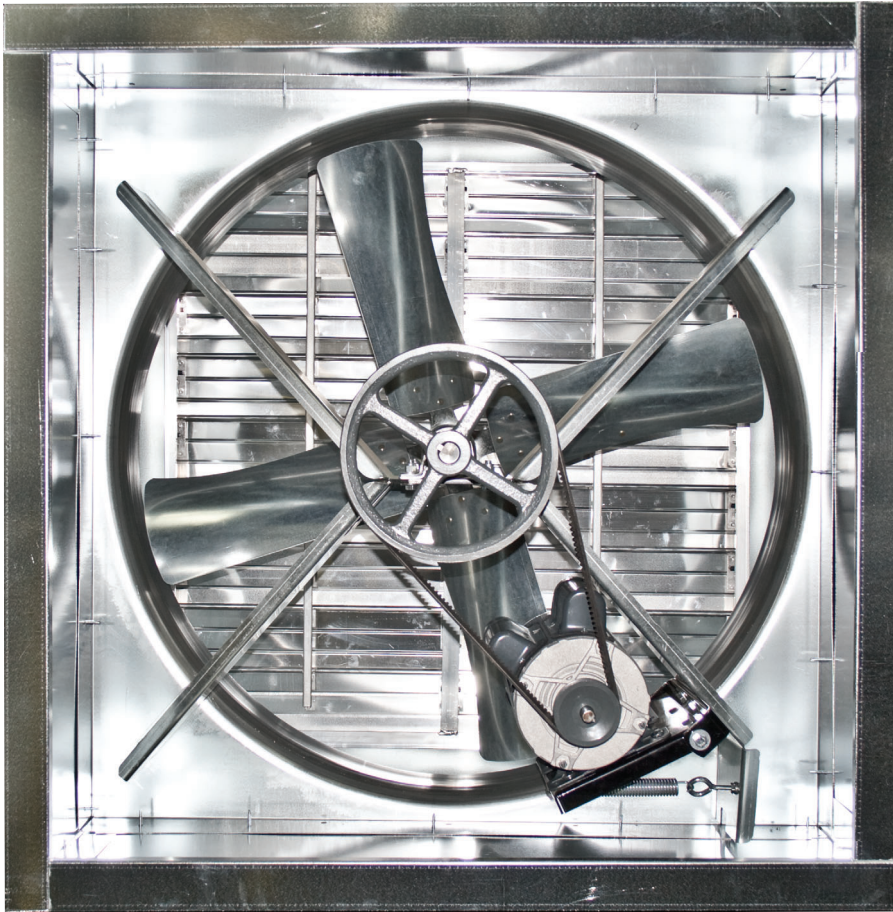

Heavy-duty X-frame - (Shown without rear guard for illustration purposes only)



Removable 12 Gauge 1" x 2" wire mesh guards are hot dip galvanized after welding. The guard is attached to the housing with poly guard clips to reduce noise and vibration.

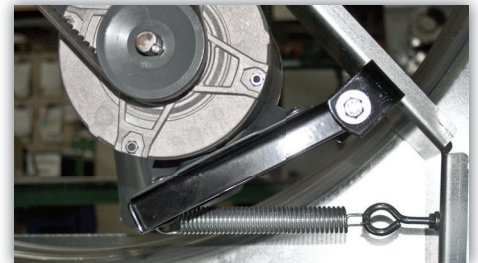


Belt drive models include a heavy duty spring belt tensioner to reduce bounce at startup and provide uniform loading to increase the life of the belt and maintain high efficiency.

Part#	Size	Phs	Spd	@0.05" SP		Drive	Prop
				CFM	Watt		
Single Phase							
VF36DM	36"	1	1	10,100	19.5	Direct	3-Glv
VF36GG	36"	1	1	9,000	18.1	Belt	4-Glv
VF36GG1	36"	1	1	11,500	15.2	Belt	4-Glv
VF36GG2	36"	1	2	11,400	15.3	Belt	4-Glv
VF50GG	50"	1	1	21,000	18.9	Belt	3-Glv
VF50GG6	50"	1	1	21,300	20.0	Belt	6-Glv
VF50GGCA	50"	1	1	20,900	18.8	Belt	3-CA
Three Phase							
VF36DM3CF	36"	3	1	10,000	19.6	Direct	3-Glv
VF36GG3	36"	3	1	11,400	15.1	Belt	4-Glv
VF503GG	50"	3	1	21,000	18.9	Belt	3-Glv
VF503GG6	50"	3	1	21,200	20.2	Belt	6-Glv
VF503GGCA	50"	3	1	20,900	18.8	Belt	3-CA

OSHA requires these fans to be mounted 7' above the floor

Optional Weather Hood

If Wall Master is mounted with the shutter side of the fan flush to an exterior wall a weather hood may be used on the exterior shutter side of the Wall Master to further protect the fan and shutter from severe winds and harsh weather.



Fan Size	Rough Opening
36"	41"W x 41"H
50"	54¾"W x 54¾"H

Wall Master Fan Size	Weather Hood Part#
36"	VFT140860
50"	VFT140861

⚠ WARNING: This product can expose you to chemicals including lead, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov/product.

Due to our continual effort to provide the best products available and adhere to market conditions; literature, products, prices and availability are subject to change without notice.